



*Synthetic non-absorbable Polyester suture.
Braided and coated.*

CHARACTERISTICS

Very high tensile strength
Excellent knot tying
Good fluency
Minimum Tissue reaction
Fixed support
Minimum memory

INDICATIONS

KeyCron is indicated for use in superficial soft tissues. Approximation and/or ligatures, cardiovascular surgery, ophthalmic surgery and orthopedic surgery.

IN VIVO TENSILE STRENGTH

Fixed (permanent)

STERILIZATION

ETO (Ethilene Oxide)

COLORING

Green or white



*Sutura sintetica neabsorbabila din poliester.
Impletita si acoperita.*

CARACTERISTICI

Rezistenta la tractiune (rupere) mare
Rezistenta excelenta a nodului
Fluiditate excelenta
Reactie minima a tesutului
Suport permanent
Memorie minima

INDICATII

Suturile chirurgicale KeyCron sunt indicate pentru tesuturi moi, pentru apropieri si/sau ligaturari; in chirurgia cardiovasculara, oftalmologica si ortopedica.

REZISTENTA LA TRACTIUNE (RUPERE)

Permanenta

STERILIZARE

ETO (oxid de etilena)

CULOARE

Verde sau alb



SPOOL (FREE SUTURE) FIR LIBER

DESCRIPTION	USP CALIBER (metric) – DIAMETRUL FIRULUI USP							
	cm COLOR CULOARE	5-0	4-0	3-0	2-0	0	1	2
		(1)	(1.5)	(2)	(3)	(3.5)	(4)	(5)
	250 G		SB4-0G250L	SB3-0G250L	SB2-0G250L	SB0G250L	SB1G250L	SB2G250L

PRE-CUT SUTURES FIR PRETAIAT

12X45	75 G	SB5-0G12X45P	SB4-0G12X45P	SB3-0G12X45P	SB2-0G12X45P	SB0G12X45P	SB1G12X45P	SB2G12X45P
12X75	75 G	SB5-0G12X75P	SB4-0G12X75P	SB3-0G12X75P	SB2-0G12X75P	SB0G12X75P	SB1G12X75P	SB2G12X75P



REVERSE CUTTING CU TAIETURA IN EXTERIOR

DESCRIPTION	USP CALIBER (metric) – DIAMETRUL FIRULUI USP							
	cm COLOR CULOARE	5-0	4-0	3-0	2-0	0	1	2
		(1)	(1.5)	(2)	(3)	(3.5)	(4)	(5)
3/8 BENDING - CURBURA								
▼ DS 16	45 G	SB5-0G45DS16	SB4-0G45DS16					
▼ DS 19	45 G		SB4-0G45DS19	SB3-0G45DS19				
	75 G		SB4-0G75DS19	SB3-0G75DS19				
▼ DS 24	75 G			SB3-0G75DS24	SB2-0G75DS24	SB0G75DS24		
▼ DS 30	75 G				SB2-0G75DS30	SB0G75DS30	SB1G75DS30	
▼ DS 39	75 G				SB2-0G75DS39	SB0G75DS39	SB1G75DS39	SB2G75DS39
▼ DS 45	90 G					SB0G75DS45	SB1G75DS45	SB2G75DS45



**REVERSE CUTTING
CU TAIETURA IN EXTERIOR**

DESCRIPTION	USP CALIBER (metric) – DIAMETRUL FIRULUI USP					
	cm COLOR CULOARE	4-0 (1.5)	3-0 (2)	2-0 (3)	0 (3.5)	1 (4)

3/8 BENDING - CURBURA							
 DS 90	50 G					SB1G50DS90	
	100 G					SB1G100DS90	

1/2 BENDING - CURBURA							
 HS 22	75 G			SB2-0G75HS22	SB0G75HS22	SB1G75HS22	
 HS 22 D	90 G						SB2G90HS22D
 HS 26 H HEAVY - RAMFORSAT	75 G		SB3-0G75HS26H	SB2-0G75HS26H	SB0G75HS26H		

STRAIGHT - DREPT							
 GS 60	75 G		SB3-0G75GS60	SB2-0G75GS60	SB0G75GS60		



**REVERSE CUTTING
PRECISION POINT/MICRO POINT**

**CU TAIETURA IN EXTERIOR
POINT DE PRECISION/MICRO POINTE**

cm COLOR CULOARE	6-0 (0.7)	5-0 (1)	4-0 (1.5)	3-0 (2)	2-0 (3)
------------------------	--------------	------------	--------------	------------	------------

3/8 BENDING - CURBURA					
 DSM 19	45 G		SB5-0G45DSM19	SB4-0G45DSM19	
	75 G		SB5-0G75DSM19	SB4-0G75DSM19	

1/2 BENDING - CURBURA					
 HSM 9	45 G		SB5-0G45HSM9	SB4-0G45HSM9	



TAPER POINT CU VARF ASCUTIT

DESCRIPTION	USP CALIBER (metric) – DIAMETRUL FIRULUI USP						
	cm COLOR CULOARE	7-0 (0.5)	6-0 (0.7)	5-0 (1)	4-0 (1.5)	3-0 (2)	2-0 (3)
	cm COLOR CULOARE	5-0 (1)	4-0 (1.5)	3-0 (2)	2-0 (3)	0 (3.5)	1 (4)
3/8 BENDING - CURBURA							
DR 11 D	75 G		SB6-0G75DR11D				
DR 13 D	75 G		SB6-0G75DR13D	SB5-0G75DR13D	SB4-0G75DR13D		
1/2 BENDING - CURBURA							
HR 13 D	90 G	SB5-0G90HR13D	SB4-0G90HR13D	SB3-0G90HR13D			
HR 17	75 G	SB5-0G75HR17	SB4-0G75HR17	SB3-0G75HR17			
HR 17 D	60 G	SB5-0G60HR17D	SB4-0G60HR17D	SB3-0G60HR17D			
	75 G	SB5-0G75HR17D	SB4-0G75HR17D	SB3-0G75HR17D			
	90 G				SB2-0G90HR17D		
HR 20	75 G		SB4-0G75HR20	SB3-0G75HR20	SB2-0G75HR20		
HR 20 D	75 G	SB5-0G75HR20D	SB4-0G75HR20D	SB3-0G75HR20D	SB2-0G75HR20D		
HR 22	75 G		SB4-0G75HR22	SB3-0G75HR22	SB2-0G75HR22		
HR 22 D	90 G		SB4-0G90HR22D	SB3-0G90HR22D	SB2-0G90HR22D		
HR 26	75 G			SB3-0G75HR26	SB2-0G75HR26	SB0G75HR26	SB1G75HR26
HR 26 D	90 G		SB4-0G90HR26D		SB2-0G90HR26D	SB0G90HR26D	
	100 G			SB3-0G100HR26D			



TAPER POINT CU VARF ASCUTIT

DESCRIPTION	USP CALIBER (metric) – DIAMETRUL FIRULUI USP					
	cm COLOR CULOARE	4-0 (1.5)	3-0 (2)	2-0 (3)	0 (3.5)	1 (4)

1/2 BENDING - CURBURA

<p>HR 27 H HEAVY - RAMFORSAT</p>	75 G			SB2-0G75HR27H	SB0G75HR27H	SB1G75HR27H	
--------------------------------------	------	--	--	---------------	-------------	-------------	--

<p>HR 30 HEAVY - RAMFORSAT</p>	75 G		SB3-0G75HR30	SB2-0G75HR30	SB0G75HR30	SB1G75HR30	
------------------------------------	------	--	--------------	--------------	------------	------------	--


<p>HR 37 H HEAVY - RAMFORSAT</p>	75 G			SB2-0G75HR37H	SB0G75HR37H	SB1G75HR37H	SB2G75HR37H
--------------------------------------	------	--	--	---------------	-------------	-------------	-------------

cm COLOR	3-0 (2)	2-0 (3)	0 (3.5)	1 (4)	2 (5)
-------------	------------	------------	------------	----------	----------

<p>HR 40 H HEAVY - RAMFORSAT</p>	75 G			SB0G75HR40H	SB1G75HR40H	SB2G75HR40H	
--------------------------------------	------	--	--	-------------	-------------	-------------	--

<p>HR 48 H HEAVY - RAMFORSATE</p>	75 G			SB0G75HR48H	SB1G75HR48H	SB2G75HR48H	
---------------------------------------	------	--	--	-------------	-------------	-------------	--

<p>HR 70 D</p>	75 G			SB0G75HR70D	SB1G75HR70D		
----------------	------	--	--	-------------	-------------	--	--

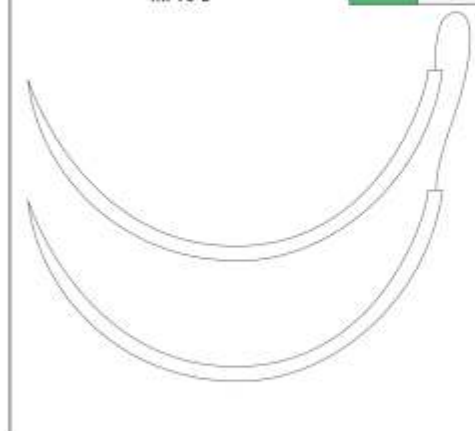

STRAIGHT - DREPT

<p>GR 22</p>	107 G		SB2-0G107GR22	SB0G107GR22			
--------------	-------	--	---------------	-------------	--	--	--



KeyCron

TAPER POINT CU VARF ASCUTIT

DESCRIPTION	USP CALIBER (metric) - DIAMETRUL FIRULUI USP				
	cm COLOR CULOARE	3-0 (2)	2-0 (3)	0 (3.5)	1 (4)

J NEEDLE - AC IN FORMA DE J



 JR 32	75 V				SB1G75JR32	
---	------	--	--	--	------------	--



TAPER CUTTING CU TAIETURA ASCUTITA

DESCRIPTION	USP CALIBER (metric) - DIAMETRUL FIRULUI USP				
	cm COLOR CULOARE	5-0 (1)	4-0 (1.5)	3-0 (2)	2-0 (3)

3/8 BENDING - CURBURA

 DTC 17 D	75 G			SB3-0G75DTC17D	SB2-0G75DTC17D	
	90 G			SB3-0G90DTC17D	SB2-0G90DTC17D	
 DTC 26 D	45 G		SB4-0G45DTC26D			
	90 G			SB3-0G90DTC26D	SB2-0G90DTC26D	

cm COLOR CULOARE	5-0 (1)	4-0 (1.5)	3-0 (2)	2-0 (3)	0 (3.5)
------------------------	------------	--------------	------------	------------	------------

1/2 BENDING - CURBURA

 HTC 17	75 G	SB5-0G75HTC17	SB4-0G75HTC17	SB3-0G75HTC17	SB2-0G75HTC17	
 HTC 17 D	75 G	SB5-0G75HTC17D	SB4-0G75HTC17D	SB3-0G75HTC17D	SB2-0G75HTC17D	
	90 G	SB5-0G90HTC17D	SB4-0G90HTC17D	SB3-0G90HTC17D	SB2-0G90HTC17D	
 HTC 26	75 G			SB3-0G75HTC26	SB2-0G75HTC26	SB0G75HTC26
 HTC 26 D	75 G			SB3-0G75HTC26D	SB2-0G75HTC26D	SB0G75HTC26D
	90 G			SB3-0G90HTC26D	SB2-0G90HTC26D	SB0G90HTC26D




TAPER CUTTING CU TAIETURA ASCUTITA

DESCRIPTION	USP CALIBER (metric) - DIAMETRUL FIRULUI USP					
	cm COLOR CULOARE	3-0 (2)	2-0 (3)	0 (3.5)	1 (4)	2 (5)
	1/2 BENDING - CURBURA					
<p>HTC 37</p>	75 G		SB2-0G75HTC37	SB0G75HTC37	SB1G75HTC37	SB2G75HTC37
<p>HTC 37 D</p>	90 G		SB2-0G90HTC37D	SB0G90HTC37D		

	cm COLOR CULOARE	2-0 (3)	0 (3.5)	1 (4)	2 (5)	5 (8)
	<p>HTC 40 H</p> <p>HEAVY - RAMFORSAT</p>	75 G		SB0G75HTC40H	SB1G75HTC40H	SB2G75HTC40H
<p>HTC 45 H</p> <p>HEAVY - RAMFORSAT</p>	90 G				SB2G90HTC45H	
<p>HTC 48 H</p> <p>HEAVY - RAMFORSAT</p>	75 G		SB0G75HTC48H	SB1G75HTC48H	SB2G75HTC48H	
<p>HTC 55 H</p> <p>HEAVY - RAMFORSAT</p>	75 G					SB5G75HTC55H



**SPATULA
SPATULA**

DESCRIPTION	USP CALIBER (metric) - DIAMETRUL FIRULUI USP					
	cm COLOR CULOARE	8-0 (0.4)	7-0 (0.5)	6-0 (0.7)	5-0 (1)	4-0 (1.5)
1/4 BENDING - CURBURA						
 VSP 8 D	45 W				SB5-0W45VSP8D	SB4-0W45VSP8D

1/2 BENDING - CURBURA						
 HSP 8 D	45 W				SB5-0W45HSP8D	

**SPATULA
PRECISION POINT/MICRO POINT**

**SPATULA
PRECIZIE**

3/8 BENDING - CURBURA						
 DSPM 6.5D	45 W	SB8-0W45DSPM6.5D	SB7-0W45DSPM6.5D			